



jc685 U.S. PTO



02/17/00

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

2355.11106

First Named Inventor or Application Identifier

TOSHIKAZU OHSHIMA, ET AL.

Express Mail Label No.

jc625 U.S. PTO

02/17/00

02/17/00

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification Total Pages **46**
3. ☒ Drawing(s) (35 USC 113) Total Sheets **21**
4. ☒ Oath or Declaration Total Pages **2**
- a. ☒ Newly executed (original or copy)
- b. ☐ Unexecuted for information purposes
- c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
- i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting
inventor(s) named in the prior application, see
37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4c, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application
Statement(s) Status still proper and desired
15. ☒ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☒ Other: Claim to priority

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____

18. CORRESPONDENCE ADDRESS☒ Customer Number or Bar Code Label**05514**

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

CLAIMS	(1) FOR ,	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS	
	TOTAL CLAIMS (37 CFR 1.16(c))	39-20 =	19	X \$ 18.00 =	\$ 342.00	
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	3-3 =	0	X \$ 78.00 =	\$ 0.00	
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$ 260.00 =	\$ 0.00	
				BASIC FEE (37 CFR 1.16(a))	\$ 690.00	
			Total of above Calculations =		\$ 1032.00	
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).					
	TOTAL =				\$ 1032.00	

19. Small entity status


- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 1032.00 to cover the filing fee is enclosed.

21. ☒ A check in the amount of \$ 40.00 to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	Brian L. Klock - Reg. No. 36,570
SIGNATURE	
DATE	February 17, 2000

BLK\cmv

TITLE OF THE INVENTION

GAME APPARATUS FOR MIXED REALITY SPACE, IMAGE
PROCESSING METHOD THEREOF, AND PROGRAM STORAGE MEDIUM

5

FIELD OF THE INVENTION

The present invention relates to a game apparatus
which allows a player to play a game in a mixed reality
space which includes both real and virtual objects and,
10 more particularly, to an apparatus which can present a
game environment in which a virtual object that
moves/acts in response to movements/actions of a real
object.

15

BACKGROUND OF THE INVENTION

The present applicant disclosed a game apparatus
that allows a player to play a game in a mixed reality
environment in Japanese Patent Laid-Open No. 11-088913.
20 In this game apparatus, two opponent players hit and
return a virtual puck toward each other.

The virtual puck is presented in a mixed reality
space as a virtual image while being given location and
velocity vectors. When the player manipulates a mallet
25 as a real object, the apparatus computes the moving
path of the puck after collision on the basis of the

location and velocity vectors of the mallet and virtual puck in accordance with the law of collision in physics, renders a CG image of the virtual puck in the mixed reality space, and presents it to the player.

5 However, in Japanese Patent Laid-Open No. 11-088913, the puck movement is determined by player's actions. More specifically, if the player does not hit the puck, the puck does not move, and the moving velocity and direction of the puck are merely
10 determined by the manipulation velocity and direction of the mallet of the player. That is, in the conventional mixed reality environment, the virtual object makes only passive motions.

 On the other hand, a real object (especially, an
15 living creature) acts according to its own will, and determines its own action in accordance with its relationship with another real object(s), e.g., the presence or behavior and layout position of that object.

 For this reason, especially the conventional game
20 apparatus suffers monotony since only passive virtual objects are rendered.

 It is an object of the present invention to provide a game apparatus which determines
movements/actions of a virtual object in a mixed
25 reality space in consideration of its relationship with a real object.

SUMMARY OF THE INVENTION

In order to achieve the above object, a game apparatus with which a player plays a game with virtual object(s) in a mixed reality space comprising:

5 viewpoint detection means for detecting the location/posture of a viewpoint of the player;
geometric information acquisition means for acquiring geometric information of real object(s);

10 recognition means for recognizing a current, relative relationship between the virtual object(s) and real object(s);

a rule memory for storing rules for controlling the action of the virtual object(s);

15 computation means for determining the next action of the virtual object(s) in accordance with the rules stored in said rule memory and in correspondence with the location/posture of the real object(s), and computing the location/posture of the virtual object(s) after the determined action; and

20 presentation means for generating at least one of image of the virtual object on the basis of the location/posture of the virtual object(s) after the action and the location/posture of the viewpoint position of the player, and for representing the mixed
25 reality space to the player by superimposing the virtual object image(s) on the player's view of the

real space.

According to a preferred aspect of the present invention, the presentation means further comprising,

image-capturing means for capturing real space
5 images of said player's view of the real space;

image generation means for generating mixed reality images representing of the mixed reality space by superimposing or overlaying said virtual object image(s) on said real space images; and

10 a video see-through type display means that the player wears wherein said mixed reality images are displayed.

According to a preferred aspect of the present invention, the presentation means further comprising,

15 An optical see-through type display means that the player wears wherein said virtual object image(s) are displayed.

According to a preferred aspect of the present invention, the game apparatus further comprising,

20 status detecting means for detecting status of the player;

wherein said computation means determines a next action of the virtual object in accordance with the rule stored in said rule memory and in correspondence
25 with the location/posture of the real object and/or the status, and computing a location/posture of the virtual

object after the determined action.

The movement of the virtual object is controlled by a rule which adapts itself on the basis of an objective of the game, and the relative relationship
5 between the virtual object and real object. Hence, the player experiences an illusion as if the virtual object had its own will, thus making the game more fun to play.

It is interesting if the movement of the virtual object changes in correspondence with the positional
10 relationship with the real object. Hence, according to a preferred aspect of the present invention, the current, relative relationship includes a layout relationship between the virtual object and real object at that time in the mixed reality space.

15 It is interesting if the movement of the virtual object changes in correspondence with the behavior of the real object. Hence, according to a preferred aspect of the present invention, the current, relative relationship includes a behavior of the real object
20 with respect to the virtual object at that time in the mixed reality space.

According to a preferred aspect of the present invention, the real object includes the player himself or herself.

25 According to a preferred aspect of the present invention, the real object includes a plurality of

players who operate the game apparatus, and the plurality of players share a single mixed reality space.

If the real object is an object which is fixed in position, according to a preferred aspect of the
5 present invention,

the geometric information acquisition means comprises:

a predetermined memory for pre-storing location information and shape information of the real object;
10 and

means for reading out the location information and shape information of the real object from the memory as needed.

If the real object is an object which is movable
15 but does not deform, according to a preferred aspect of the present invention,

the geometric information acquisition means comprises:

a predetermined memory for pre-storing shape
20 information of the real object;

a location/posture sensor for detecting a location/posture of the real object; and

means for setting a region the real object is expected to occupy in the mixed real space in
25 accordance with the detected location/posture of the real object. In this case, the precision of the shape

information can be improved.

If the real object is a player,
the geometric information acquisition means
comprises:

5 a sensor for detecting a location/posture of a
head of the player; and

means for setting a region having a fixed, known
shape that approximates the player in the mixed reality
space in accordance with the detected location/posture
10 of the head.

Since the player is a person, his or her shape
changes complicatedly. By setting a fixed known shape
as the player shape, real-time processing is possible.

According to a preferred aspect of the present
15 invention, when the game is a battle game with the
virtual object, an objective is to decrease an expected
score of the player.

According to a preferred aspect of the present
invention, when the game is a cooperative game with the
20 virtual object, an objective is to increase an expected
score of the player.

According to a preferred aspect of the present
invention, the rule controls the action of the virtual
object on the basis of an objective of the game and a
25 relative relationship between the virtual object and
real object.

According to a preferred aspect of the present invention, the rule stored in the rule memory expresses the action of the virtual object as an action pattern with a predetermined aim for achieving the objective.

5 According to a preferred aspect of the present invention, the pattern has a path disadvantageous to the player in consideration of a layout relationship between the virtual object and real object.

10 In a mixed reality environment, it is indispensable to detect the three-dimensional location/posture, and when the player is one of real objects, an output from the viewpoint detection means for detecting the location/posture of the viewpoint of the player is also used as information which is to be
15 acquired by the geometric information acquisition means and pertains to a location and shape of the player, thus minimizing an increase in cost.

20 In a mixed reality environment, it is indispensable to detect the three-dimensional location/posture, and the viewpoint detection means detects a location/posture of a head of the player, and

 the apparatus further comprises detection means for detecting a location/posture of a hand of the player; and
25 means for recognizing a relative location of the hand of the player with respect to the head as a

command on the basis of an output from the detection means, thus implementing an intuitive user interface by means of actions.

According to a preferred aspect of the present
5 invention, the presentation means comprises:

means for aligning the location/posture of the real object to the location/posture of the virtual object after movement;

means for generating an image of the virtual
10 object after alignment in correspondence with an occlusion relationship; and

a head-mounted display device.

Note that the above object can also be achieved by an image processing method for a game apparatus with
15 which a player plays a game with virtual object(s) in a mixed reality space comprising:

viewpoint detection step for detecting the location/posture of a viewpoint of the player;

geometric information acquisition step for
20 acquiring geometric information of real object(s);

recognition step for recognizing a current, relative relationship between the virtual object(s) and real object(s);

a rule memory for storing rules for controlling
25 the action of the virtual object(s);

computation step for determining the next action

of the virtual object(s) in accordance with the rules stored in said rule memory and in correspondence with the location/posture of the real object(s), and computing the location/posture of the virtual
5 object(s) after the determined action; and

presentation step for generating at least one of image of the virtual object on the basis of the location/posture of the virtual object(s) after the action and the location/posture of the viewpoint
10 position of the player, and for representing the mixed reality space to the player by superimposing the virtual object image(s) on the player's view of the real space.

Furthermore, the above object can be achieved by
15 a storage medium which stores a program of an image processing method for a game apparatus with which a player plays a game with virtual object(s) in a mixed reality space comprising:

viewpoint detection program step for detecting
20 the location/posture of a viewpoint of the player;

geometric information acquisition program step for acquiring geometric information of real object(s);

recognition program step for recognizing a current, relative relationship between the virtual
25 object(s) and real object(s);

a rule memory for storing rules for controlling

the action of the virtual object(s);

computation program step for determining the next
action of the virtual object(s) in accordance with the
rules stored in said rule memory and in correspondence
5 with the location/posture of the real object(s), and
computing the location/posture of the virtual
object(s) after the determined action; and

presentation program step for generating at least
one of image of the virtual object on the basis of the
10 location/posture of the virtual object(s) after the
action and the location/posture of the viewpoint
position of the player, and for representing the mixed
reality space to the player by superimposing the virtual
object image(s) on the player's view of the real space.

15 Other features and advantages of the present
invention will be apparent from the following
description taken in conjunction with the accompanying
drawings, in which like reference characters designate
the same or similar parts throughout the figures thereof.

20

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated
in and constitute a part of the specification,
illustrate embodiments of the invention and, together
25 with the description, serve to explain the principles
of the invention.

Fig. 1 is a view for explaining the action pattern of a virtual object (target or the like) in a game according to an embodiment of the present invention;

5 Fig. 2 is a perspective view showing a game environment of a game apparatus according to the embodiment of the present invention;

10 Fig. 3 is a top view showing the game environment of the game apparatus according to the embodiment of the present invention;

 Fig. 4 is a view illustrating a state in which a player who joins the game wears an equipment;

15 Fig. 5 is a block diagram showing the arrangement of a controller of the game apparatus in case of a single player;

 Fig. 6 is a block diagram showing the arrangement of a controller of the game apparatus in case of two players;

20 Fig. 7 is a block diagram for explaining an action → command conversion function in a game management/virtual image generation unit 3003;

 Fig. 8 is a block diagram showing the detailed arrangement of a game management unit 5002 shown in Fig. 6;

25 Fig. 9 is a view for explaining the pattern of a dodge action of a virtual object;

Fig. 10 is a flow chart showing the control sequence of the dodge action of the virtual object;

Fig. 11 is a view for explaining the pattern of a
dodge action of the virtual object to hide behind a
5 real object;

Fig. 12 is a flow chart showing the control sequence of the hide action of the virtual object;

Fig. 13 is a view for explaining the pattern of
an attack action of the virtual object with respect to
10 the player;

Fig. 14 is a flow chart showing the control sequence of the attack action of the virtual object;

Fig. 15 is a view for explaining the pattern of a collision action of the virtual object;

Fig. 16 is a flow chart showing the control sequence of the collision action of the virtual object;

Fig. 17 is a view for explaining the pattern of a collision/explosion action of the virtual object;

Fig. 18 a flow chart showing the control sequence
20 of the collision/explosion action of the virtual object;

Fig. 19 is a view for explaining the pattern of a detour action of the virtual object;

Fig. 20 is a flow chart for explaining the
25 control sequence of the detour action of the virtual object; and

Fig. 21 is a view for explaining the pattern of a
detour action of the virtual object.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

5 A game apparatus according to the present
invention will be described in detail hereinafter with
reference to the accompanying drawings.

<Behavior of Virtual Object>

10 Fig. 1 depicts the relationship between actions
of the user (player) and a virtual object in a game
apparatus of this embodiment. As can be seen from
Fig. 1, a virtual object of this game associates itself
with the user (player) as if it had its own will and
objective.

15 That is, referring to Fig. 1, three players 10,
11, and 12 join the game. In this game, a cubic real
object 40 and columnar real object 50 are provided. In
this game, virtual "spacemen" (to be referred to as
targets hereinafter) 20 to 24 as opponents are
20 displayed. Assume that a virtual object 30 as a
"bullet" fired by the player 10 hits the real object 40.
On the other hand, assume that a virtual object 31 as a
bullet fired by the target 20 hits the player 12.

25 In this case, each virtual object makes unique
movements or actions. That is, the target 21 as a
spaceman runs away (60) by sensing the presence of the

player 11. Or the target 21 comes on or chases the
player 11 (61). The target 23 dodges not to collide
against the real object 40 (63). The plurality of
targets 22 gather around the real object 50 (62). The
5 target 24 hides behind the real object 40 by sensing
the presence of the player 10. The virtual bullet 30
fired by the player 10 explodes (64) upon colliding
against the real object 40. Likewise, the bullet 31
explodes (65) upon hitting the player 12.

10 In this manner, the virtual objects that appear
in the game system of this embodiment make actions such
as collision, explosion, movement, dodge, and the like
in consideration of the presence, location, layout, and
behavior of the real objects or the location, behavior,
15 and line of sight of the player.

<Arrangement of Game Environment>

Figs. 2 and 3 show the outer appearance of a game
environment in which the game apparatus according to
the embodiment of the present invention is used.

20 Referring to Figs. 2 and 3, reference numeral 100
is a table on which real objects that appear in the
game are placed. The table 100 restricts real objects
for which matching with the virtual objects must be
considered. In other words, objects placed on the
25 table 100 require an alignment process with the virtual

objects, an occlusion process as a result of the alignment process, and the like.

Two still real objects 101 and a movable real object 104 are placed on the table 100. Since the real
5 objects 101 are still, their locations and shapes can be input in advance. Since the real object 104 changes its location although its shape remains the same, it has a location sensor 103.

As will be described later, the player joins the
10 game wearing a head-mounted display device (to be abbreviated as an HMD hereinafter). Fig. 2 also depicts a virtual object 102 displayed on the display screen of the HMD when a certain player sees objects on the table via the HMD. Since this virtual object is
15 displayed in the HMD, it is not seen by a third party at an objective viewpoint position who does not join the game.

Fig. 3 is a top view of the table 100. In this case, no virtual object 102 is illustrated, and a
20 player 1000 who joins the game is illustrated instead. Fig. 4 shows the player 1000.

Referring to Fig. 4, the player 1000 wears an HMD 1001 on his or her head, and a controller 1004 having a gun shape on his or her hand. A location/posture
25 sensor 1002 and a video camera 1003 which captures an image in front of the player are fixed to the HMD 1001.

When the HMD 1001 is attached to the head of the player, the head location/posture sensor 1002 outputs a signal representing the head location/posture of the player 1000. Since the video camera 1003 uses, e.g., a video see-through HMD in this game, it can sense a real landscape in real time. Hence, when an optical see-through HMD is used, the video camera 1003 is not required.

The controller 1004 has a gun shape to make the game more fun to play for the player, but is an input device serving as a user interface in practice. That is, the controller 1004 comprises a location/posture sensor (1005 in Fig. 5) for detecting the location/posture of a hand of the player, and a switch 1006 for detecting an action of a trigger (not shown) as a shooting action of the player.

<Arrangement of Game Management Apparatus>

Fig. 5 shows the arrangement of a game management apparatus 3000 used in the game system shown in Figs. 2 to 4. Fig. 5 shows the arrangement of the game management apparatus 3000 in case of a single player. If there are a plurality of players, the system arrangement shown in, e.g., Fig. 6, is used.

Referring to Fig. 5 that shows a single-player game system, a measuring unit 3001 receives the output signal from the location sensor 103 provided to the

real object 104 to measure the location of the object
104. A location/posture measuring unit 3002 measures
the location/posture of the head of the player (in
other words, the location/posture of the viewpoint of
5 the player) from the output signal of the
location/posture sensor 1002 provided to the head of
the player in accordance with a known scheme (e.g.,
Japanese Patent Laid-Open No. 11-088913 mentioned
above). An interactive input device 3005 receives the
10 signal from the sensor 1005 attached to user's hand to
measure the location/posture of the hand, and also
detects that the player has operated the trigger switch
1006.

The location signal of the real object 104, the
15 location/posture signal of the viewpoint of the player,
the location/posture signal of the hand of the player,
and a trigger signal indicating whether or not the
trigger has been operated are input to a game
management/virtual image generation unit 3003. This
20 unit generates virtual images such as targets, bullets,
and the like in accordance with rules to be described
later, and sends them to an image mixing unit 3004.
Since the image mixing unit 3004 receives a real image
sensed by the video camera 1003 of the player from an
25 input unit 1006, it mixes the generated virtual images
with the real image (video image). Since the image

mixing unit 3004 receives dynamic location information of the real object 104 measured by the location measuring unit 3001 and still location information of each of the two still real objects 101 in the example
5 shown in Fig. 2, it aligns the real and virtual objects on the basis of such location information and that (and shape information) of each generated virtual image, and also executes an occlusion and mask processes as needed, thus assuring matching between these objects.

10 The mixed image whose matching is adjusted is output to the HMD 101 and is presented to the player.

This game adopts a scheme that recognizes player's actions as game commands for the purpose of improving operability. Fig. 7 is a block diagram
15 showing functions which are used in the game management/virtual image generation unit 3003 to interpret player's actions so as to recognize commands. The feature of this scheme lies in that the location/posture of the head is measured by the
20 measuring unit 3002, the location/posture of the hand is measured by the measuring unit 3005, and player's actions are recognized on the basis of the hand location/posture relative to the head location/posture.

Fig. 6 shows the system used when a plurality of
25 players join the game. Players A and B who represent a plurality of players A, B, C, D,... will be explained

below, but circuits corresponding to the number of
players are provided in practice to execute processes.
Referring to Fig. 6, the core of this game system
comprises measuring units 5006A and 5006B for measuring
5 the locations/postures of the heads and hands of
players A and B, input units 5001A and 5001B for
receiving the location/posture information
(three-dimensional location/posture information) from
the respective players, a game management unit 5002,
10 image generation/mixing units 5004A and 5004B
respectively for players A and B, and a database 5003
for storing three-dimensional information of each still
object. Players A and B respectively wear HMDs 5005A
and 5005B. Cameras (not shown in Fig. 6) are attached
15 to the HMDs as in Fig. 5, and color images from the
cameras of the individual players are sent to the image
generation/mixing units 5004A and 5004B.

The three-dimensional location/posture
information input units 5001A and 5001B send the
20 location/posture information of the hands and
viewpoints of players A and B to the image
generation/mixing units 5004A and 5004B.

The image generation/mixing units 5004A and 5004B
correspond to the image mixing unit 3004 in Fig. 5, mix
25 color images from the video cameras corresponding to
the camera 1003 in Fig. 5 and virtual images generated

based on rendering information of virtual objects sent from the game management unit 5002 to produce mixed reality images, and send them to the HMDs 5005A and 5005B respectively.

5 Fig. 8 explains the arrangement of the game management unit 5002 and shows the I/O relationship of information among its generation unit, the command/location/posture information input units 5006A and 5006B, and the image generation/mixing unit 5004A
10 and 5004B.

Game progress states of players A and B are respectively stored in game state memories 6003A and 6003B. Various kinds of information (objectives, aims, and movement patterns) of individual targets are
15 pre-stored in a memory 6001. The objective of each target is to attack a player and to decrease his or her expected value. The aim of each target is to shoot a player, and to dodge an attack from the player. The movement pattern controls the target to:

20 hide behind a still object;
 assemble with other targets;
 escape from a player who is closing in;
 chase a player running away from the target; and
 move while dodging a real object.

25 Note that the objective and aim may be set to be the same.

The database 5003 stores three-dimensional image information such as shape information, color, and the like of each real object. Furthermore, the database 5003 includes information that pertains to each player, 5 for example, information that represents the player size (normally approximated by a rectangular parallelopiped), and the like. Approximation by a rectangular parallelopiped is made since the three-dimensional shape of the player need not be 10 tracked accurately in real time. That is, if a bullet arrives within the range of this size, it is determined that the bullet hit the player.

The current game progress states of the individual players are stored in the memories 6003A and 15 6003B. In this game, a command input by a player is determined by each command/location/posture information input unit 5006A (5006B) on the basis of the hand location/posture with respect to the head. The command input by the player is input to a game progress 20 processor 6002A (6002B) of each player via the command/location/posture information input unit 5006A (5006B). The game progress processor 6002A (6002B) manages progress of the game in accordance with the game progress state stored in the memory 6003A (6003B), 25 target information stored in the memory 6001, and information which is stored in the database 5003 and

pertains to the players and real objects. A change in game along with the progress of the game is stored in the memory 6003A (6003B) to update its contents. The progress result of each player, i.e., information that
5 pertains to the location/posture of a target, the location/posture of a bullet, and the like in relation to that player is input from the processor 6002A (6002B) to the game management unit 5002. The game management unit 5002 systematically manages a virtual
10 space for each player. With this systematic management, virtual objects such as a target, bullet, and the like, which have changed in relation to player A, and those which have changed in relation to player B are spatially merged. With this merging, a plurality of
15 players can share a single mixed reality space.

<Control of Movement of Virtual Object>

Fig. 9 explains an example of a dodge action of a virtual object. More specifically, when the player points the gun-shaped controller 1004 forward, the game
20 progress processor 6002 determines the moving direction and distance of a target falling within a conical range 7001 in a line-of-fire direction of the gun so that the target moves outside the range 7001.

Fig. 10 is a flow chart showing the control
25 sequence for implementing the action of the virtual object shown in Fig. 9. It is checked in step S2 if a

virtual object falls with the range of an angle $\pm\theta_1$ to have the line-of-fire direction as an axis. The angle θ_1 matches the range 7001 shown in Fig. 9. As the angle θ_1 is larger, the target can escape more easily.

- 5 In step S4, a vector v which has as a start point the foot of a perpendicular dropped from the position of the virtual object to the line of fire and has a direction pointing to the position of the virtual object is computed. In step S6, a dodge velocity
- 10 vector v_1 is computed based on this vector v :

$$v_1 = k \cdot (v / |v|)$$

where k is a coefficient for adjusting the magnitude of the velocity. In step S8, the current position p of the virtual object is updated:

- 15 $p = p + \Delta t \cdot v_1$

- Fig. 11 explains an example of a hide action of a virtual object. More specifically, when a target falls within the field of view of a player, which has the front direction of his or her head as an axis, the game
- 20 progress processor 6002 determines the moving direction and distance of that target, so that the target moves to fall within a dead angle range which is formed by a real object present within the field of view of the player when viewed from the player.

Fig. 12 is a flow chart showing the control sequence for implementing the action of the virtual object shown in Fig. 11.

It is checked in step S10 if a virtual object
5 falls within the field of view of the player. In step S12, real objects falling within the field of view of the player are searched. In step S14, a real object closest to the virtual object is selected from those found in step S12, and is set as a hiding place. In
10 step S16, the movement of the virtual object is defined. That is, a vector v pointing to the foot of a perpendicular that was dropped from the position of the virtual object to an axis that connects the player's viewpoint and real object is computed. In step S18, a
15 hide velocity vector is computed by:

$$v_2 = k \cdot (v / |v|)$$

In step S20, the current position (position after the hide action) of the virtual object is updated.

Fig. 13 explains an example of an attack action
20 of the target to the player. More specifically, when a player falls within a predetermined distance range from the target, the game progress processor 6002 controls the target to move toward the head of that player. At this time, for example, when the target falls within a
25 predetermined conical range having the line-of-fire direction of the player's gun as an axis, the processor

6003 controls the target to move in a direction away from the conical range and in a direction toward the head of the player. Fig. 14 shows this control sequence.

5 It is checked in step S30 if a virtual object falls within the range of an angle $\pm\theta_1$ to have the line-of-fire direction as an axis. In step S32, a vector v_1 which has as a start point the foot of a perpendicular dropped from the position of the virtual
10 object to the line of fire and has a direction toward the position of the virtual object is computed. In step S34, a dodge velocity vector with respect to the line of fire is computed by:

$$v_a = k_1 \cdot \frac{v_1}{|v_1|}$$

15 In step S36, using a vector v_2 from the object position to the viewpoint position a vector v_b indicating an approach velocity to the player is computed by:

$$v_b = k_2 \cdot \frac{v_2}{|v_2|}$$

20 In step S38, the current position of the virtual object is updated based on the vectors v_a and v_b .

 Fig. 15 explains an action of a target when a real object is present. That is, when a real object is present in the velocity vector direction of the target, the game progress processor 6002 generates a moving
25 vector of the target after collision, so that the

target bounces off the real object. Fig. 16 shows its control sequence.

It is checked in step S40 if a virtual object has collided against a real object. In step S42, a vector
5 normal to the colliding position is computed. In step S44, a plane defined by that normal vector and the moving vector before collision is computed, and a vector which is symmetrical about the normal vector on the plane and has a colliding point as a start point is
10 computed. The computed vector is set as a new velocity vector v . In step S46, the current position is updated.

Fig. 17 explains an action in which when a real object or player is present in the velocity vector direction of a target, the game progress processor 6003
15 computes an interference between the target and that real object (player) and generates virtual images used when that target explodes and then disappears (e.g., images of smoke of explosion, an object which disappears gradually, and the like). Fig. 18 shows its
20 control sequence. It is checked in step S50 if a virtual object is exploding. If NO in step S50, it is checked in step S52 if that virtual object has collided against a real object. If YES in step S52, a colliding time t_0 is set in step S54. It is checked in step S56
25 if a time t after collision has exceeded a predetermined time duration T , i.e., if a predetermined

time T has elapsed after collision. If NO in step S56,
an explosion pattern is displayed in correspondence
with the time t elapsed in step S60. More specifically,
changes in smoke of explosion are presented to the
5 player. After the predetermined time T has elapsed,
the virtual object disappears.

Fig. 19 explains a detour action of a virtual
object. That is, when a real object is present in a
prospective moving direction of a target, the game
10 progress processor 6003 generates a moving route (path)
of the target which is separated minimum distance d
from the prospective route and defines a smooth curve.
Note that this curve may use a bezier curve, spline
curve, or the like. Fig. 20 shows its control sequence.

15 It is checked in step S70 if the moving route
crosses a real object (or a virtual object is detouring
the real object). If YES in step S70, detour distance
d is computed from distance l to the real object in
accordance with Fig. 21 in step S72. This distance d
20 is used in step S76. It is checked in step S74 if
distance l from the virtual object to the real object
is smaller than predetermined distance R. If $l \geq R$,
completion of detour is determined (step S80). Note
that R is distance which prevents the virtual object
25 from touching the real object, and is defined by:

$$R = r_1 + r_2 + \Delta r$$

where r_1 is the size (e.g., radius) of the virtual object, r_2 is the size (e.g., radius) of the real object, and Δr is a parameter constant for setting distance when the virtual and real objects pass each other. While $l < R$, a vector, which has a direction toward the foot of a perpendicular dropped from the center of gravity of the real object along the route onto the prospective moving route, and length d , is set to be a vector indicating the detour direction of the virtual object in step S76. In step S78, a vector, which has a direction toward the foot of a perpendicular dropped from the center of gravity of the real object along the route onto the prospective moving route, and length d , is set to be a detour direction vector. In this manner, the virtual object can detour the real object while maintaining distance that keeps it away from the real object.

The movement patterns of targets (virtual objects) shown in Figs. 9 to 21 are merely examples. With this game system, the player can experience game feelings as if a virtual object (target) decided its own movement pattern in consideration of its relation with real objects including a player, and acted. Such game allows the player to feel as if the player himself or herself existed in the mixed reality space and targets as virtual images acted by sensing the presence

of the player and other real objects, thus making the game more fun to play. In the prior art, especially, the hockey game proposed by the present applicant, a puck merely simulates simple natural laws such as

5 physics, but in this embodiment, the virtual object can act with a given objective as if it had its own will.

<Modification>

Various modifications of the present invention can be made beyond the above embodiment.

10 For example, in the above embodiment, the video see-through HMD is used. However, the present invention can be applied to a mixed reality environment using an optical see-through HMD.

15 The present invention is not limited to a battle game but can also be applied to any other games as long as a virtual object preferably makes an interactive action with a player.

The movement patterns of the virtual objects are not limited to those shown in Figs. 9 to 21.

20 Note that although the above-described embodiments describe a case where attacking action of a virtual object (target) to a player is determined based only upon the distance between the target and player, other arbitrary conditions may be added to motivate the
25 virtual target to attack or activate another action.

For instance, in a case of playing a game where

parameters are set for each player and the parameter(s) is changed as the game progresses, attacking action may be determined by referring to the value of the parameter(s). More specifically, for a player having a
5 low parameter value for vigor (energy), i.e., a weakening (dying) player, intensive attack may be given. Alternatively, the virtual object (target) may stay away (run away) from a strong player (or a player is equipped with a powerful weapon). These movement
10 (action) pattern can be stored in target information memory.

The parameters of each player can be stored in game progress processor 6002 and controlled by game management unit 5002. Game management unit 5002, e.g.,
15 decreases a life parameter of a player damaged by a target and if a player having a life parameter of which value is lower than predetermined value, controls movement of the virtual objects (target) to attack the player.

20 As described above, by determining the action of the virtual object (target) based on information other than the position or posture of the player, the game becomes more entertaining to the players.

To restate, according to the present invention,
25 since the movements/actions of a virtual object are determined in consideration of its relation with real

objects (that can include a player) in a mixed reality space, the game becomes more fun to play.

As many apparently widely different embodiments of the present invention can be made without departing
5 from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the appended claims.

WHAT IS CLAIMED IS:

1. A game apparatus with which a player plays a game with virtual object(s) in a mixed reality space comprising:

- 5 viewpoint detection means for detecting the location/posture of a viewpoint of the player; geometric information acquisition means for acquiring geometric information of real object(s);
- recognition means for recognizing a current,
- 10 relative relationship between the virtual object(s) and real object(s);
- a rule memory for storing rules for controlling the action of the virtual object(s);
- computation means for determining the next action
- 15 of the virtual object(s) in accordance with the rules stored in said rule memory and in correspondence with the location/posture of the real object(s), and computing the location/posture of the virtual object(s) after the determined action; and
- 20 presentation means for generating at least one of image of the virtual object on the basis of the location/posture of the virtual object(s) after the action and the location/posture of the viewpoint position of the player, and for representing the mixed
- 25 reality space to the player by superimposing the

virtual object image(s) on the player's view of the
real space.

2. A game apparatus according to claim 1, wherein
5 said presentation means further comprising,

image-capturing means for capturing real space
images of said player's view of the real space;

image generation means for generating mixed
reality images representing of the mixed reality space
10 by superimposing or overlaying said virtual object
image(s) on said real space images; and

a video see-through type display means that the
player wares wherein said mixed reality images are
displayed.

15

3. A game apparatus according to claim 1, wherein
said presentation means further comprising,

An optical see-through type display means that
the player wares wherein said virtual object image(s)
20 are displayed.

4. A game apparatus according to claim 1, further
comprising,

status detecting means for detecting status of
25 the player;

wherein said computation means determines a next action of the virtual object in accordance with the rule stored in said rule memory and in correspondence with the location/posture of the real object and/or the status, and computing a location/posture of the virtual object after the determined action.

5 5. The apparatus according to claim 1, wherein the current, relative relationship includes a layout relationship between the virtual object and real object
10 at that time in the mixed reality space.

6. The apparatus according to claim 1, wherein the current, relative relationship includes a behavior of the real object with respect to the virtual object at that time in the mixed reality space.

15 7. The apparatus according to claim 1, wherein the real object includes the player himself or herself, and said recognition means recognizes a current, relative relationship between the virtual object and the player.

8. The apparatus according to claim 1, wherein the
20 real object includes a plurality of players who operate said game apparatus, and the plurality of players share a single mixed reality space.

9. The apparatus according to claim 1, wherein the real object is an object which is fixed in position,
25 and

said geometric information acquisition means
comprises:

a predetermined memory for pre-storing location
information and shape information of the real object;

5 and

means for reading out the location information
and shape information of the real object from said
memory as needed.

10. The apparatus according to claim 1, wherein the
10 real object is an object which is movable but does not
deform, and

said geometric information acquisition means
comprises:

a predetermined memory for pre-storing shape
15 information of the real object;

a location/posture sensor for detecting a
location/posture of the real object; and

means for setting a region the real object is
expected to occupy in the mixed real space in
20 accordance with the detected location/posture of the
real object.

11. The apparatus according to claim 1, wherein the
real object is a player, and

said geometric information acquisition means
25 comprises:

a sensor for detecting a location/posture of a head of the player; and

means for setting a region having a fixed, known shape that approximates the player in the mixed reality space in accordance with the detected location/posture of the head.

12. The apparatus according to claim 1, wherein when the game is a battle game with the virtual object, an objective is to decrease an expected score of the player.

13. The apparatus according to claim 1, wherein when the game is a cooperative game with the virtual object, an objective is to increase an expected score of the player.

14. The apparatus according to claim 1, wherein the rule controls the action of the virtual object on the basis of an objective of the game and a relative relationship between the virtual object and real object.

15. The apparatus according to claim 1, wherein the rule stored in said rule memory expresses the action of the virtual object as an action pattern with a predetermined aim for achieving the objective.

16. The apparatus according to claim 15, wherein the pattern has a path disadvantageous to the player in consideration of a layout relationship between the virtual object and real object.

17. The apparatus according to claim 11, wherein when the player is one of real objects, an output from said viewpoint detection means for detecting the location/posture of the viewpoint of the player is also
5 used as information which is to be acquired by said geometric information acquisition means and pertains to a location and shape of the player.

18. The apparatus according to claim 1, wherein said viewpoint detection means detects a location/posture of
10 a head of the player, and

said apparatus further comprises detection means for detecting a location/posture of a hand of the player; and

means for recognizing a relative location of the
15 hand of the player with respect to the head as a command on the basis of an output from said detection means.

19. The apparatus according to claim 1, wherein said presentation means comprises:

20 means for aligning the location/posture of the real object to the location/posture of the virtual object after movement;

means for generating an image of the virtual object after alignment in correspondence with an
25 occlusion relationship; and

a head-mounted display device.

20. An image processing method for a game apparatus
with which a player plays a game with virtual object(s)
in a mixed reality space comprising:

viewpoint detection step for detecting the

5 location/posture of a viewpoint of the player;

geometric information acquisition step for
acquiring geometric information of real object(s);

recognition step for recognizing a current,
relative relationship between the virtual object(s) and

10 real object(s);

a rule memory for storing rules for controlling
the action of the virtual object(s);

computation step for determining the next action
of the virtual object(s) in accordance with the rules

15 stored in said rule memory and in correspondence with
the location/posture of the real object(s), and
computing the location/posture of the virtual
object(s) after the determined action; and

presentation step for generating at least one of

20 image of the virtual object on the basis of the
location/posture of the virtual object(s) after the
action and the location/posture of the viewpoint
position of the player, and for representing the mixed
reality space to the player by superimposing the

25 virtual object image(s) on the player's view of the
real space.

21. The method according to claim 20, wherein the player wears a video see-through type display, and said presentation step further comprising,

image-capturing step for capturing real space
5 images of said player's view of the real space;
image generation step for generating mixed
reality images representing of the mixed reality space
by superimposing or overlaying said virtual object
image(s) on said real space images and for displaying
10 said mixed reality images on the display.

22. The method according to claim 20, wherein the player wears an optical see-through type display and said presentation step representing the mixed reality space to the player by displaying the virtual object
15 image(s) on the display.

23. The method according to claim 20, further comprising,

status detecting step for detecting status of the player;
20 wherein said computation step determines a next action of the virtual object in accordance with the rule stored in said rule memory and in correspondence with the location/posture of the real object and/or the status, and computing a location/posture of the virtual
25 object after the determined action.

24. The method according to claim 20, wherein the current, relative relationship includes a layout relationship between the virtual object and real object at that time in the mixed reality space.

5 25. The method according to claim 20, wherein the current, relative relationship includes a behavior of the real object with respect to the virtual object at that time in the mixed reality space.

26. The method according to claim 20, wherein the
10 real object includes the player himself or herself, and the recognition step includes the step of recognizing a current, relative relationship between the virtual object and the player.

27. The method according to claim 20, wherein the
15 real object includes a plurality of players who operate the game apparatus, and the plurality of players share a single mixed reality space.

28. The method according to claim 20, wherein the real object is an object which is fixed in position,
20 and

the geometric information acquisition step includes the steps of:

pre-storing location information and shape information of the real object in a predetermined
25 memory; and

reading out the location information and shape information of the real object from the memory as needed.

29. The method according to claim 20, wherein the
5 real object is an object which is movable but does not deform, and

the geometric information acquisition step includes the steps of:

pre-storing shape information of the real object
10 in a predetermined memory;

detecting a location/posture of the real object by a location/posture sensor; and

setting a region the real object is expected to occupy in the mixed real space in accordance with the
15 detected location/posture of the real object.

30. The method according to claim 20, wherein the real object is a player, and

the geometric information acquisition step includes the steps of:

20 detecting a location/posture of a head of the player; and

setting a region having a fixed, known shape that approximates the player in the mixed reality space in accordance with the detected location/posture of the
25 head.

31. The method according to claim 20, wherein when the game is a battle game with the virtual object, an objective is to decrease an expected score of the player.

5 32. The method according to claim 20, wherein when the game is a cooperative game with the virtual object, an objective is to increase an expected score of the player.

33. The method according to claim 20, wherein the
10 rule controls the action of the virtual object on the basis of an objective of the game and a relative relationship between the virtual object and real object.

34. The method according to claim 20, wherein the
15 rule stored in the rule memory expresses the action of the virtual object as an action pattern with a predetermined aim for achieving the objective.

35. The method according to claim 34, wherein the pattern has a path disadvantageous to the player in consideration of a layout relationship between the
20 virtual object and real object.

36. The method according to claim 30, wherein when the player is one of real objects, an output from said viewpoint detection step of detecting the location/posture of the viewpoint of the player is also
25 used as information which is to be acquired in the

geometric information acquisition step and pertains to a location and shape of the player.

37. The method according to claim 20, wherein the viewpoint detection step includes the step of detecting
5 a location/posture of a head of the player, and

said method further comprises the detection step of detecting a location/posture of a hand of the player; and

the step of recognizing a relative location of
10 the hand of the player with respect to the head as a command on the basis of an output in the detection step.

38. The method according to claim 20, wherein the presentation step includes the steps of:

aligning the location/posture of the real object
15 to the location/posture of the virtual object after movement; and

generating an image of the virtual object after alignment in correspondence with an occlusion relationship.

20 39. A storage medium which stores a program of an image processing method for a game apparatus with which a player plays a game with virtual object(s) in a mixed reality space comprising:

viewpoint detection program step for detecting
25 the location/posture of a viewpoint of the player;

geometric information acquisition program step
for acquiring geometric information of real object(s);

recognition program step for recognizing a
current, relative relationship between the virtual
5 object(s) and real object(s);

a rule memory for storing rules for controlling
the action of the virtual object(s);

computation program step for determining the next
action of the virtual object(s) in accordance with the
10 rules stored in said rule memory and in correspondence
with the location/posture of the real object(s), and
computing the location/posture of the virtual
object(s) after the determined action; and

presentation program step for generating at least
15 one of image of the virtual object on the basis of the
location/posture of the virtual object(s) after the
action and the location/posture of the viewpoint
position of the player, and for representing the mixed
reality space to the player by superimposing the
20 virtual object image(s) on the player's view of the
real space.

ABSTRACT OF THE DISCLOSURE

There is disclosed a game apparatus which allows a virtual object to act in a mixed reality space as if it had its own will. The game apparatus according to 5 this invention allows a player to play a game with a virtual object in a mixed reality space. A rule for controlling the action of the virtual object on the basis of the objective of the game, and the relative positional relationship between the virtual object and 10 real object is pre-stored. The locations of the player and real object are detected, and the relative positional relationship between the player or real object, and the virtual object is recognized. The next action of the virtual object is determined according to 15 the stored rule, and a virtual image of the virtual object is generated on the basis of the location/posture of the virtual object after the determined action and the location/posture of the viewpoint position of the player, thus presenting the 20 generated virtual image to the player.

FIG. 1

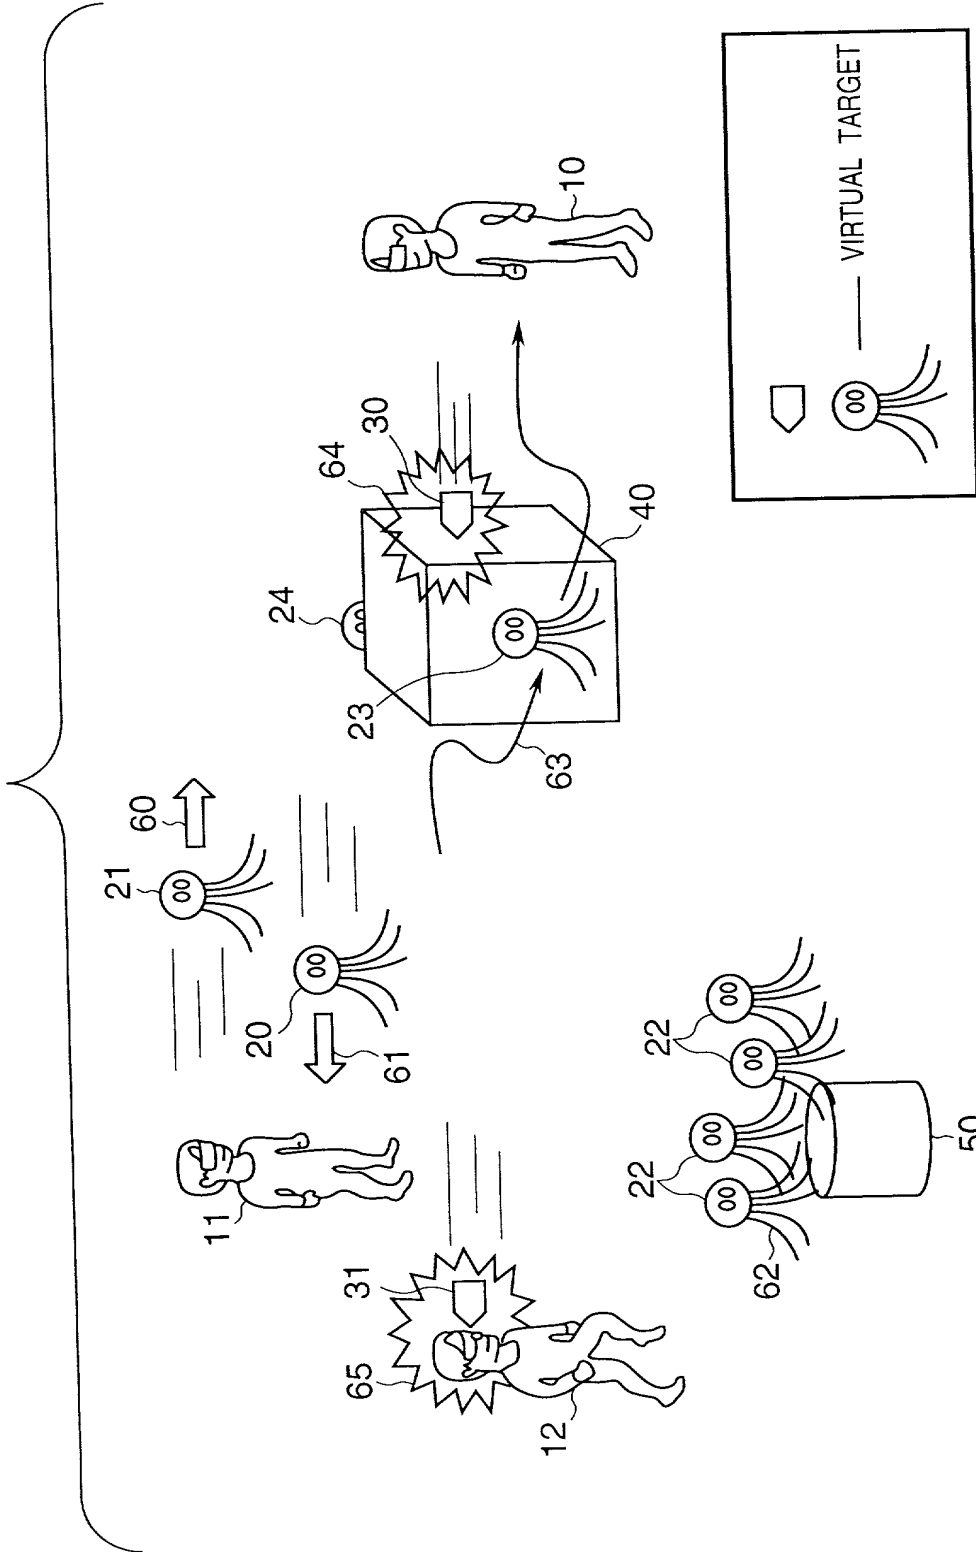


FIG. 2

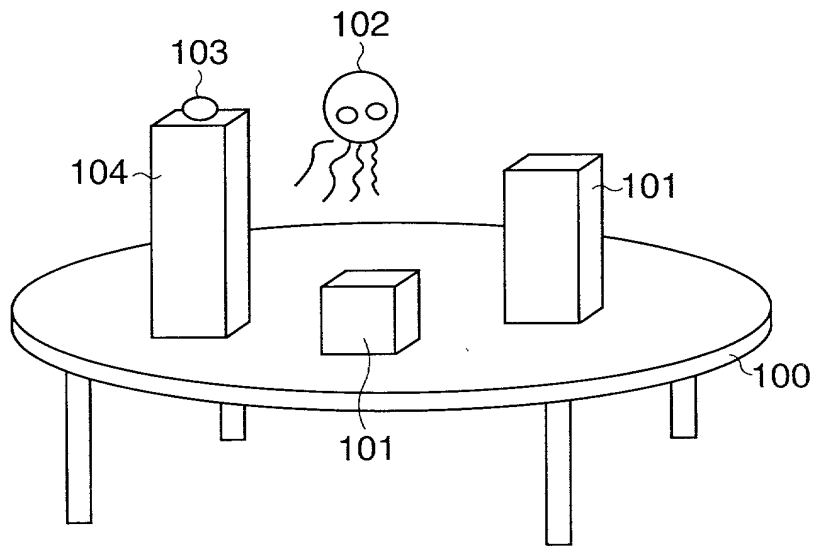


FIG. 3

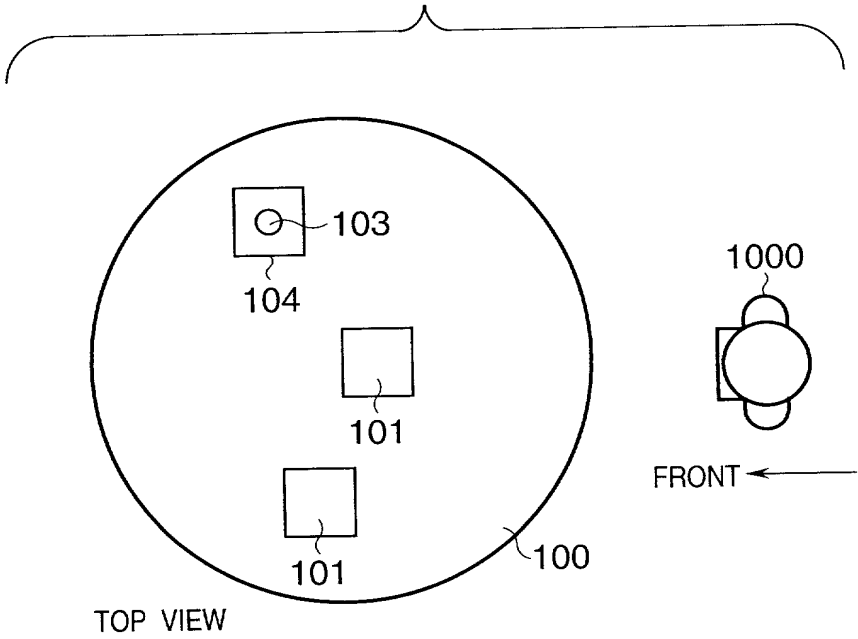


FIG. 4

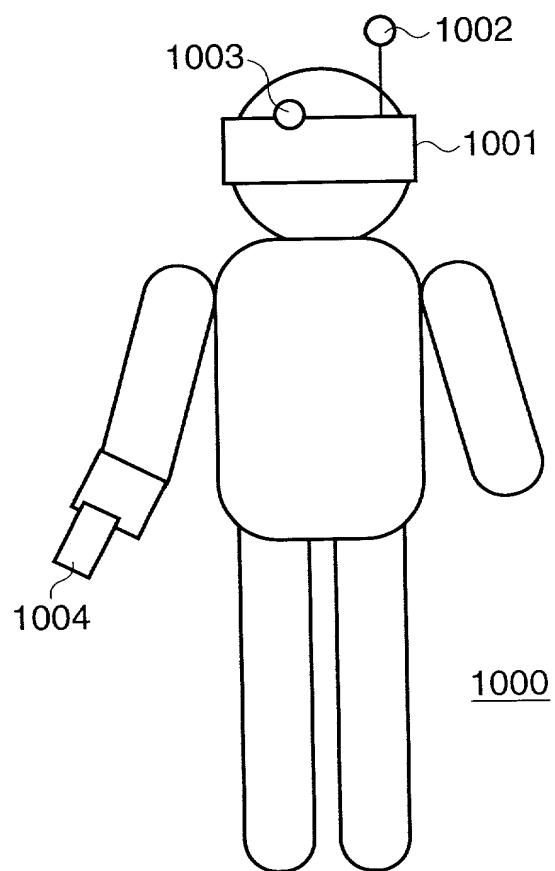


FIG. 5

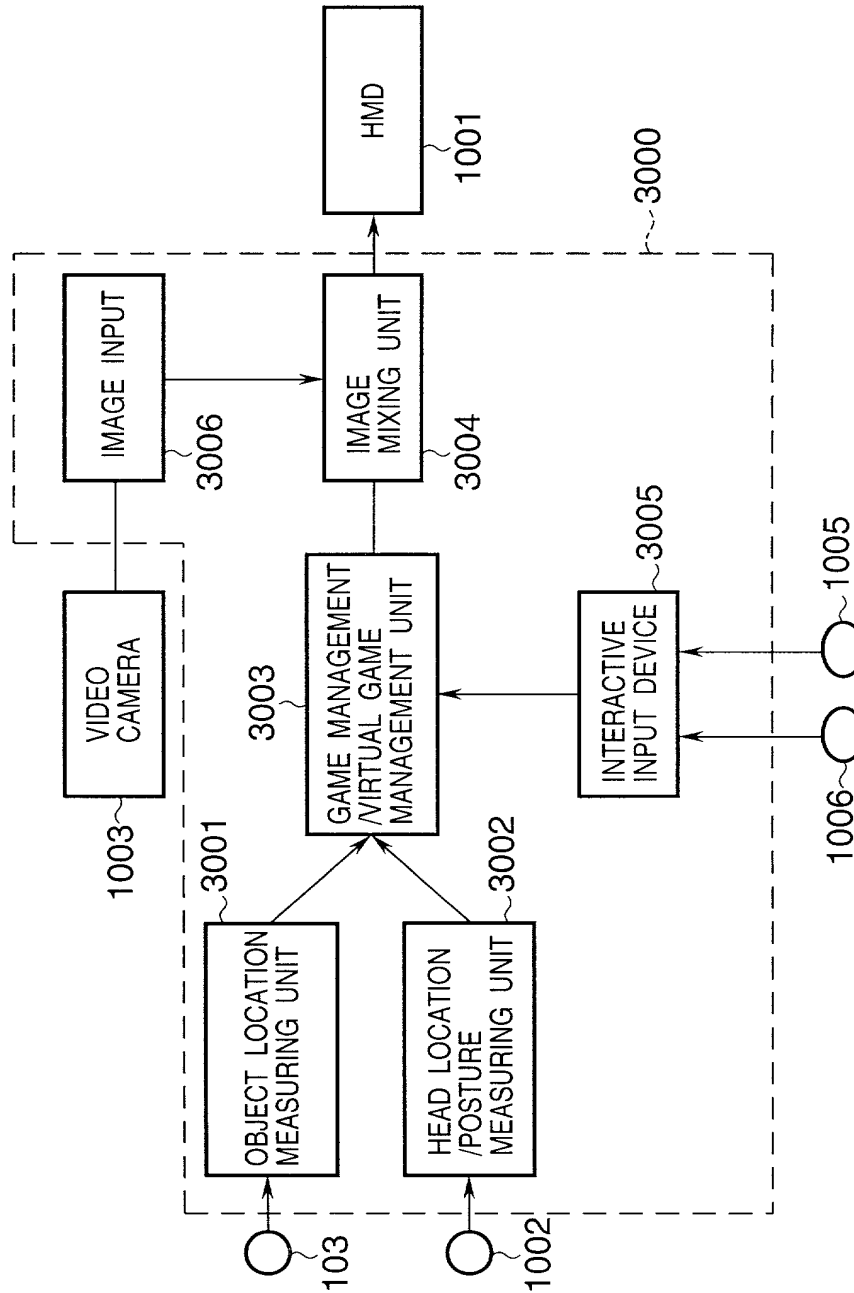
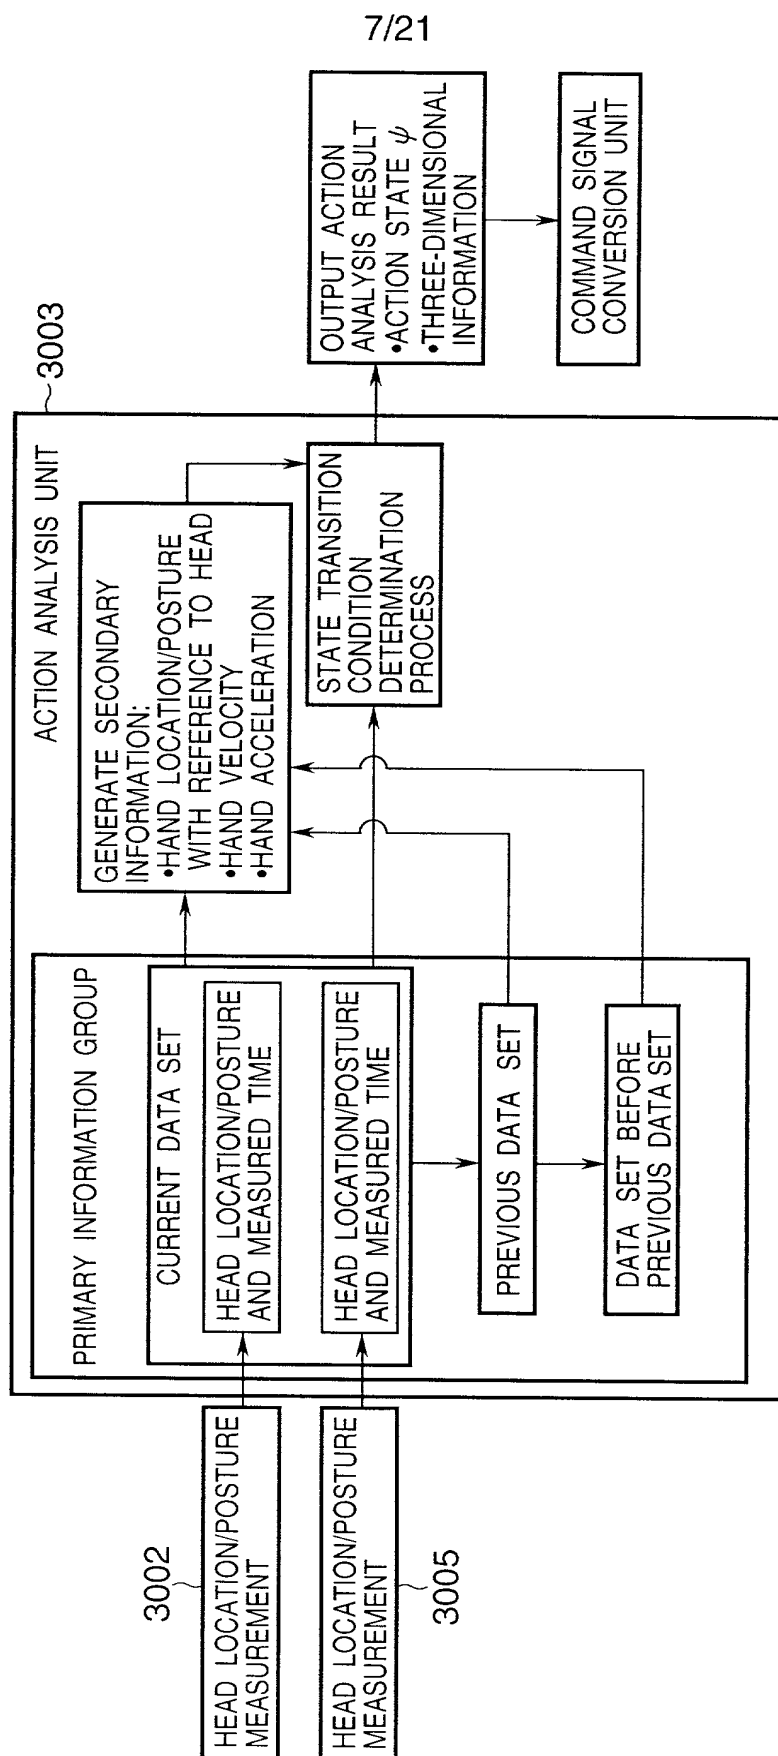


FIG. 6

The diagram illustrates a system architecture for multiple players (PLAYER A, PLAYER B, and others). At the top, a **GAME MANAGEMENT UNIT 5002** is connected to a **DATABASE 5003**. The database provides data to the game management unit, which then sends **RENDERING INFORMATION OF VIRTUAL OBJECT AND ANOTHER PLAYER INFORMATION** to the processing units. Each player's setup includes a **HEAD/HAND LOCATION/POSTURE MEASURING UNIT** (5006A for Player A, 5006B for Player B) that sends **LOCATION/POSTURE INFORMATION OF HAND AND VIEWPOINT, AND COMMAND** to a **COMMAND/LOCATION/POSTURE INFORMATION INPUT UNIT** (5001A for Player A, 5001B for Player B). These input units feed into **IMAGE GENERATION/MIXING UNITS** (5004A for Player A, 5004B for Player B). The mixing units also receive rendering information from the game management unit and output **COLOR IMAGE** and **MIXED REALITY IMAGE** to **HMD** (5005A for Player A, 5005B for Player B) units. The HMD units then provide feedback to the input units. Ellipses indicate that the system can support more than two players.

FIG. 7



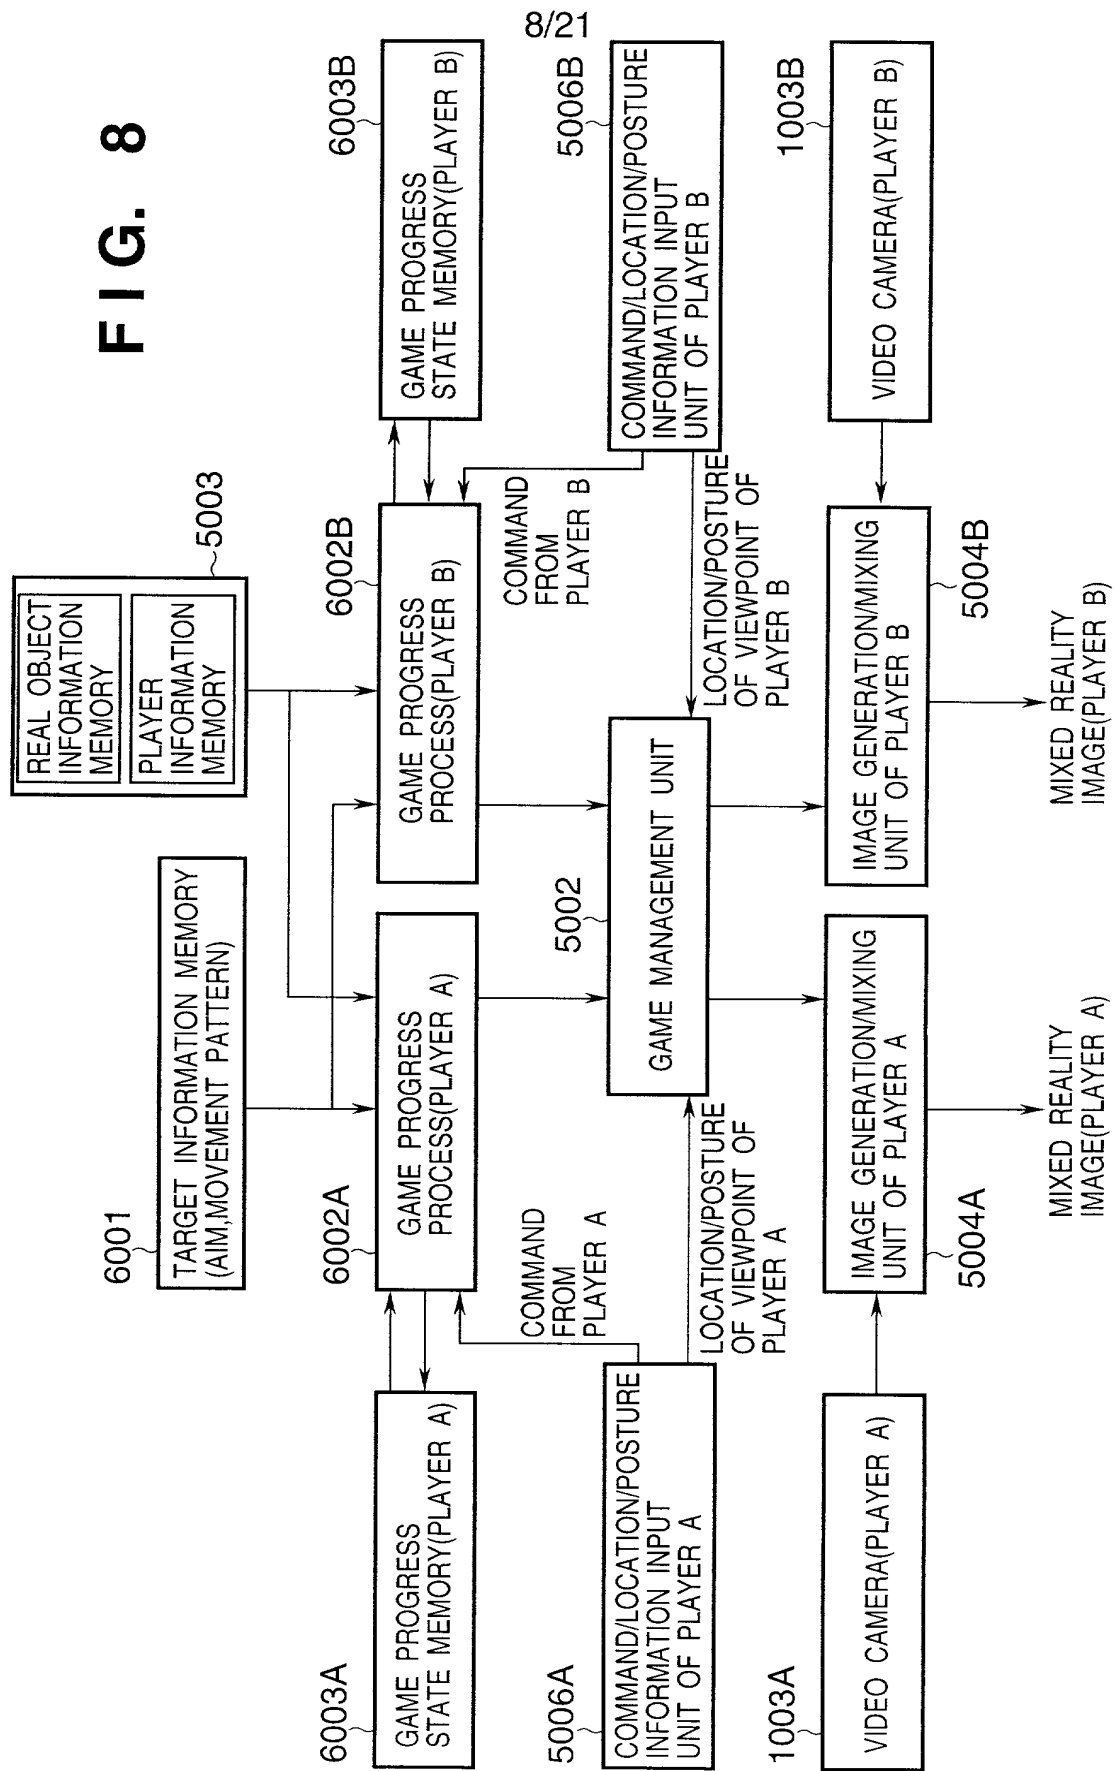


FIG. 9

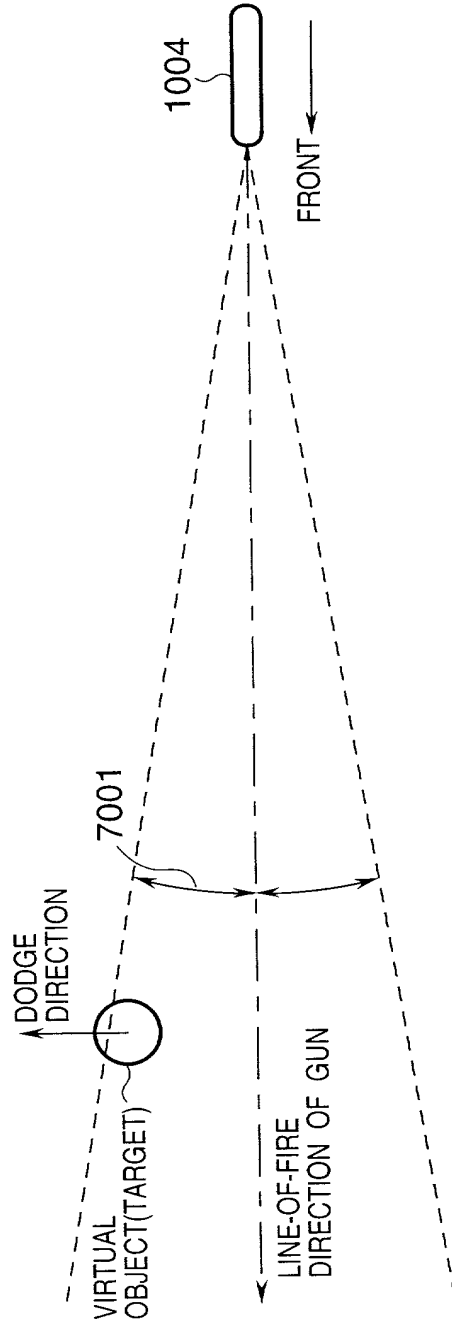


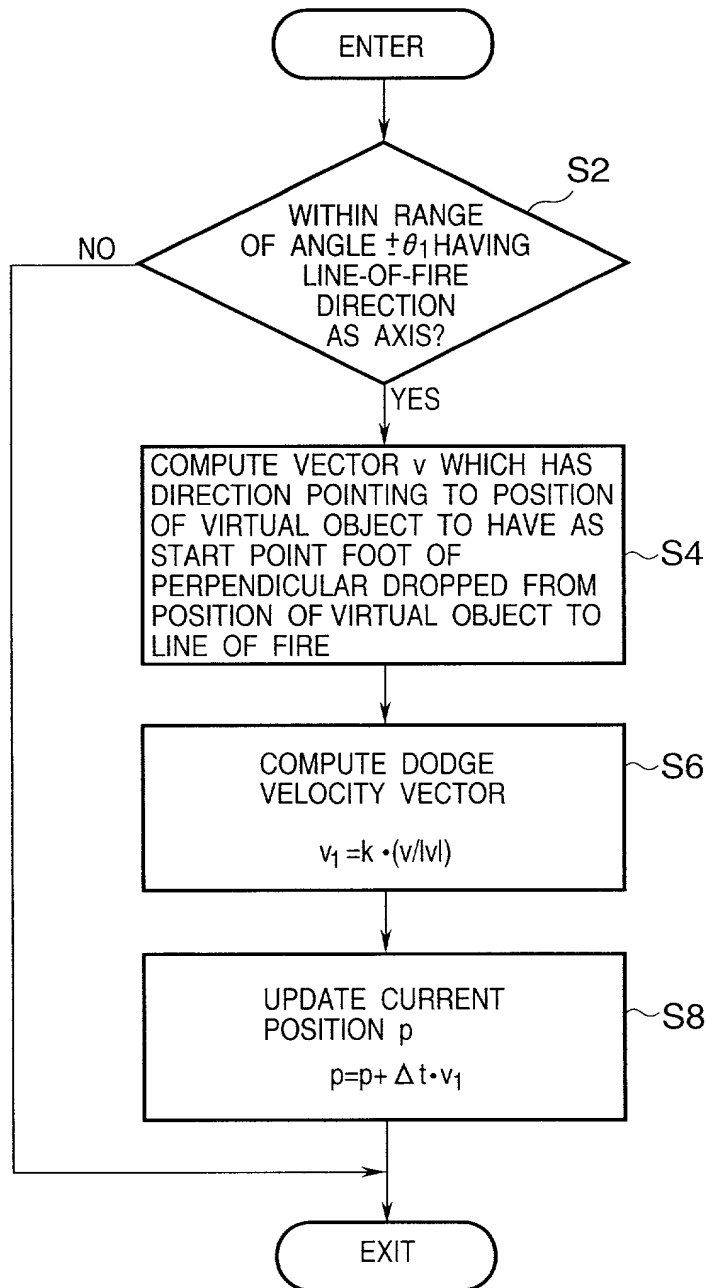
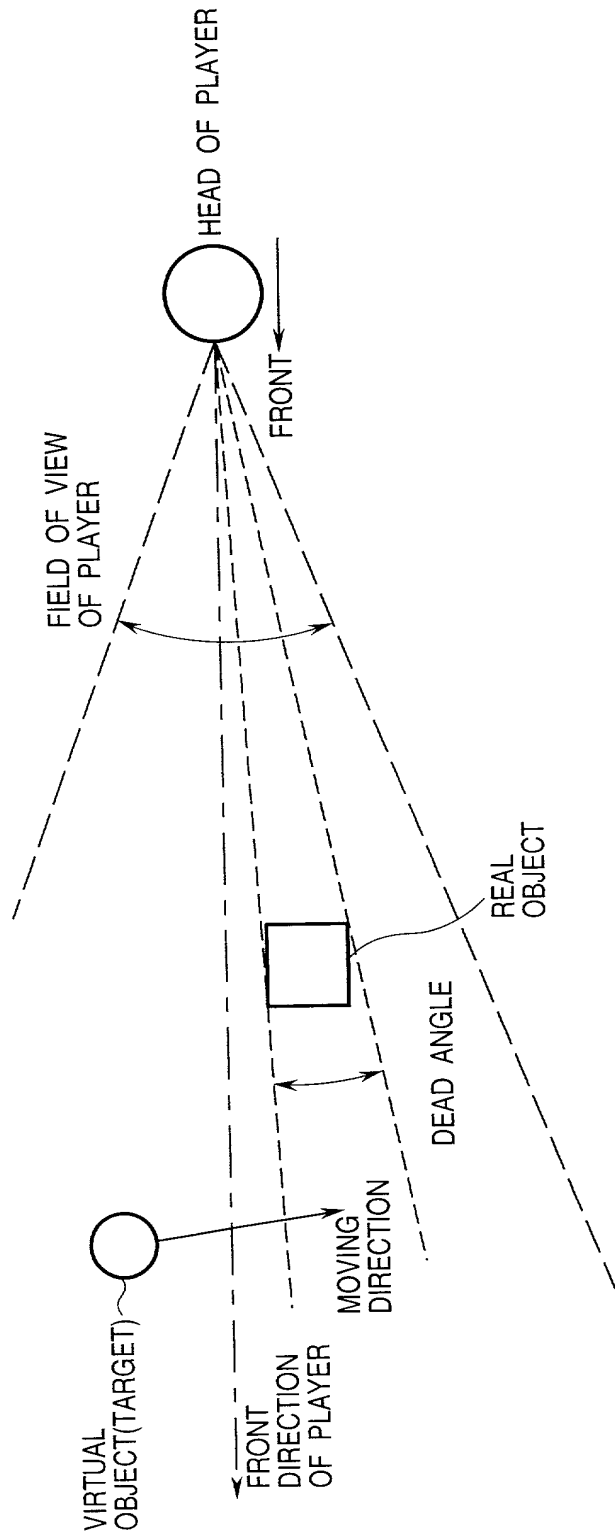
FIG. 10

FIG. 11



12/21

FIG. 12

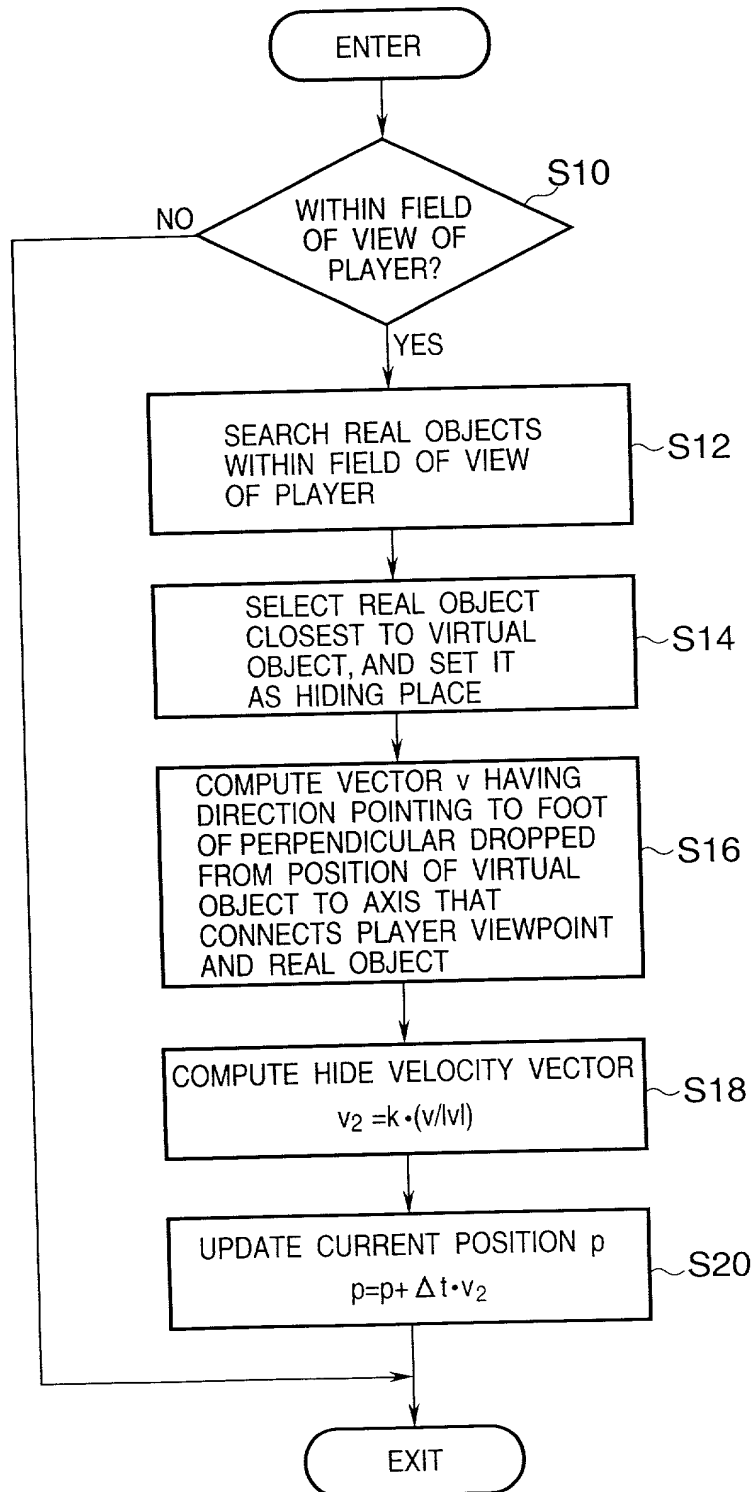


FIG. 13

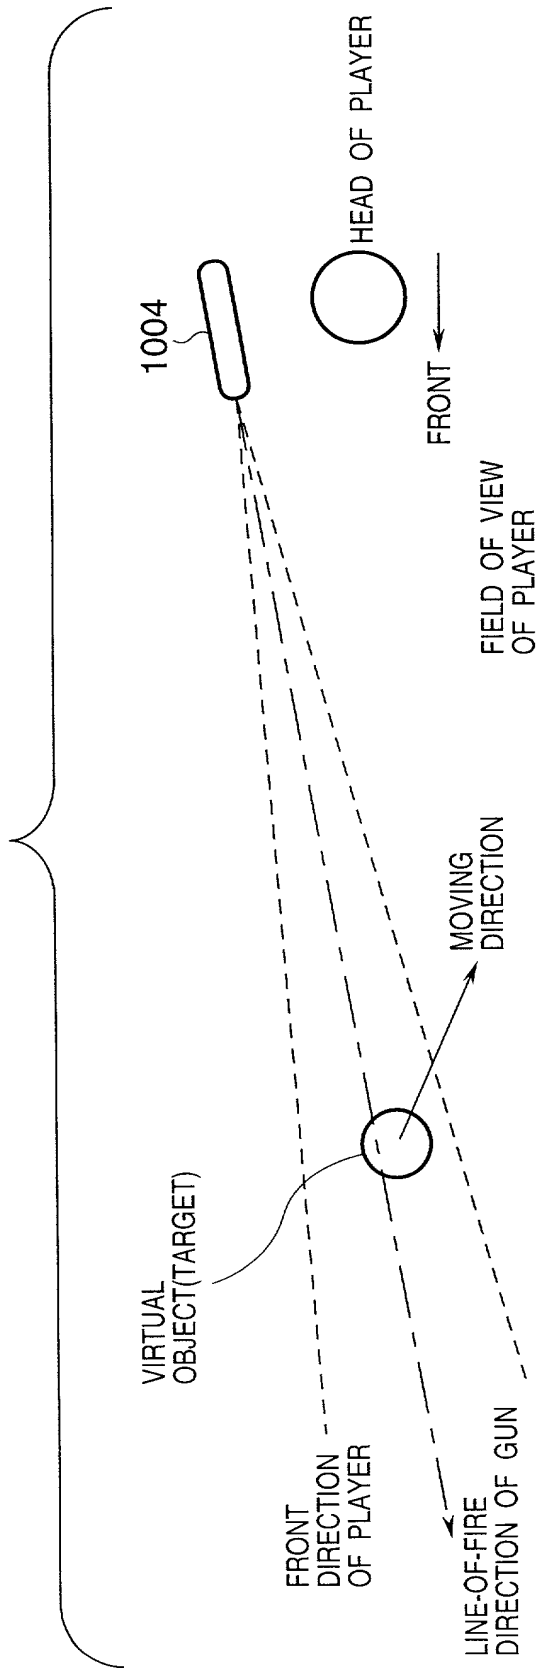


FIG. 14

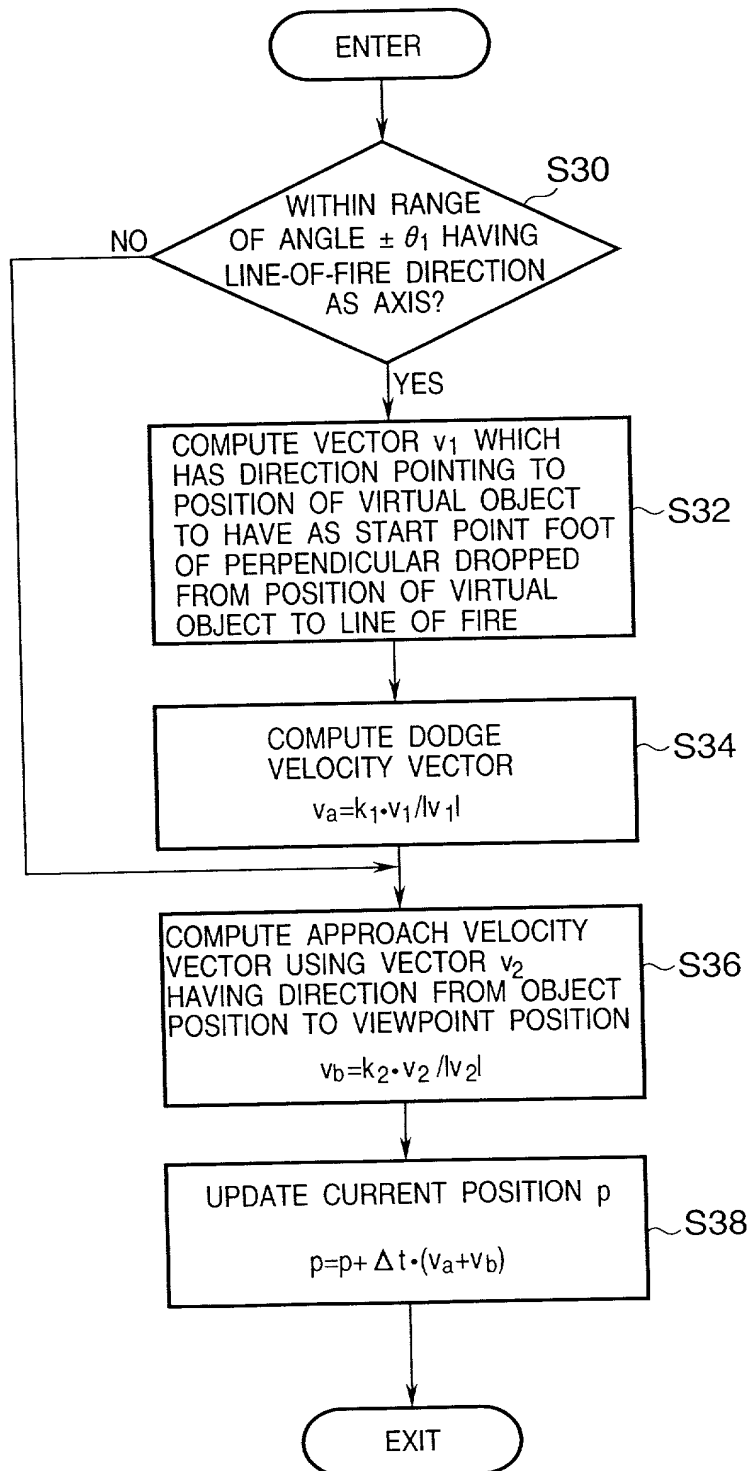


FIG. 15

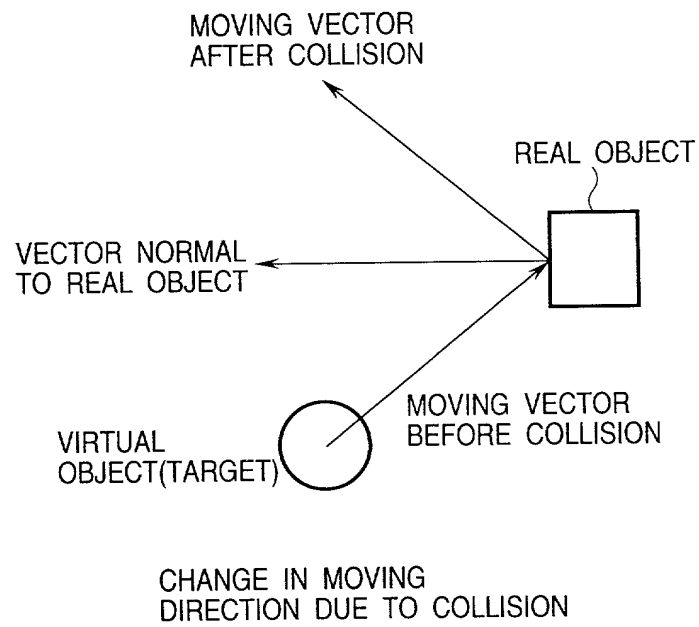


FIG. 16

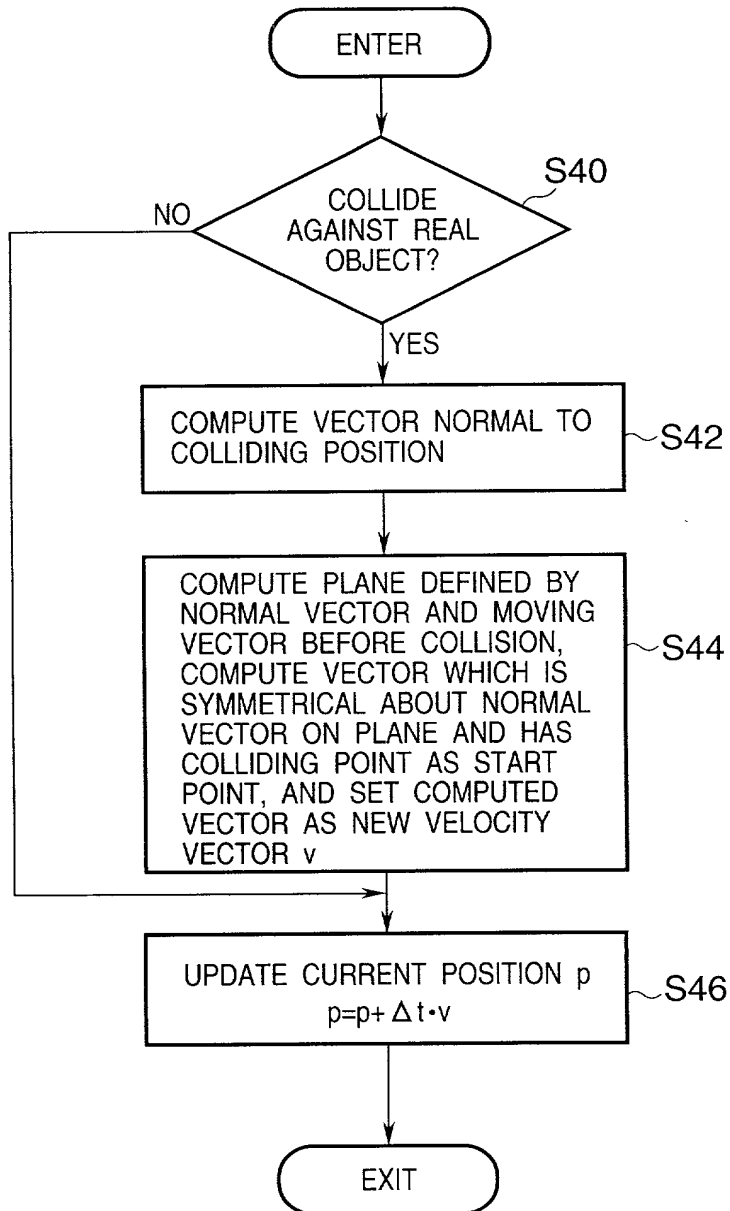


FIG. 17

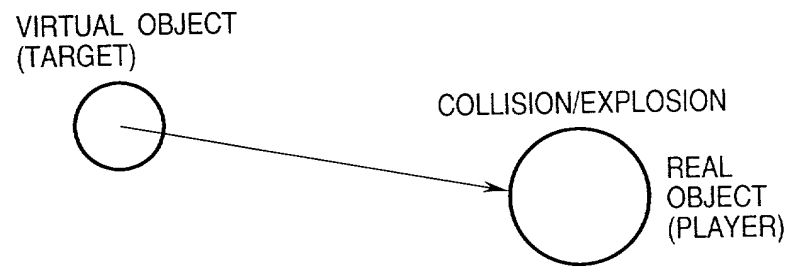


FIG. 18

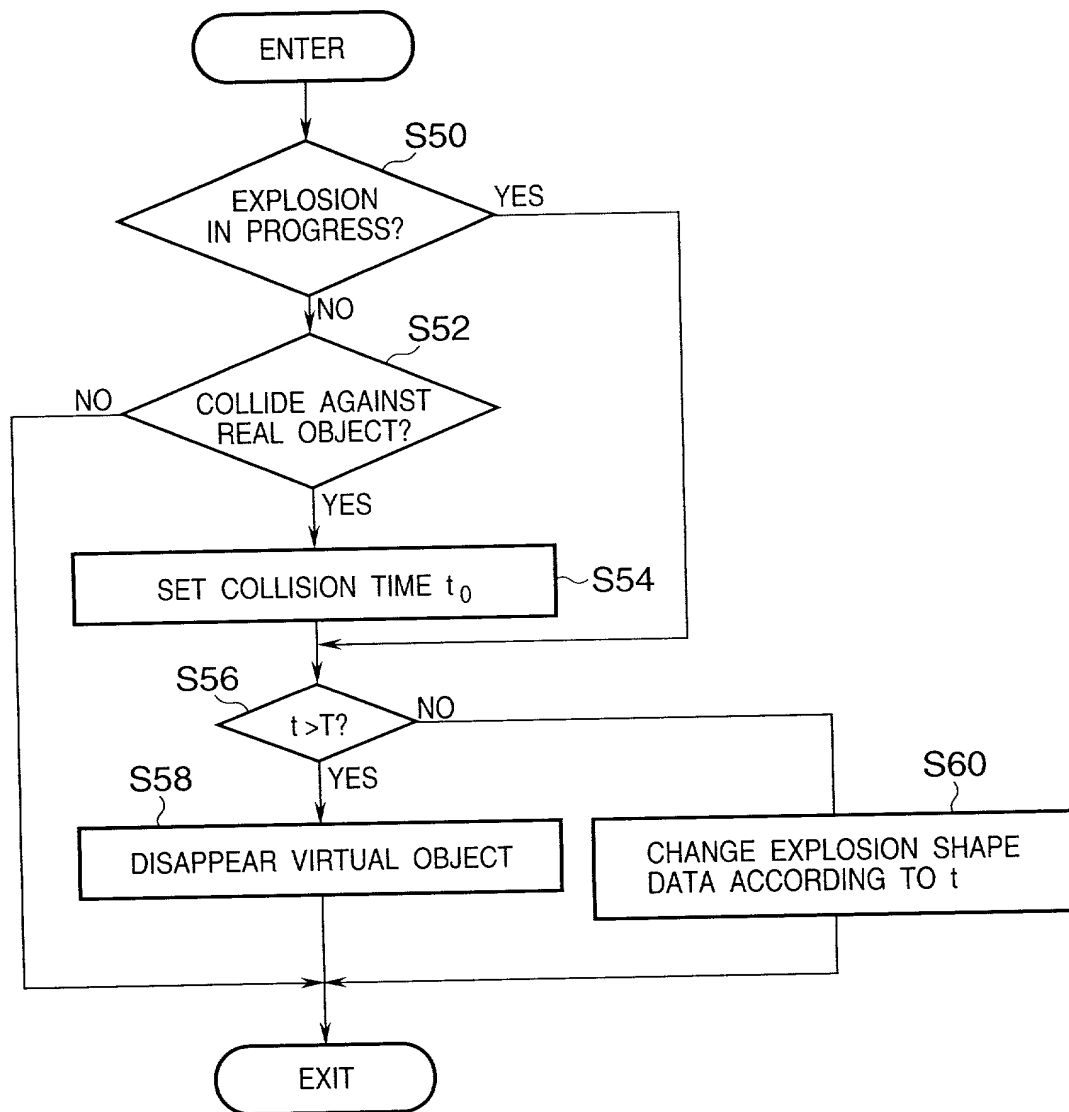


FIG. 19

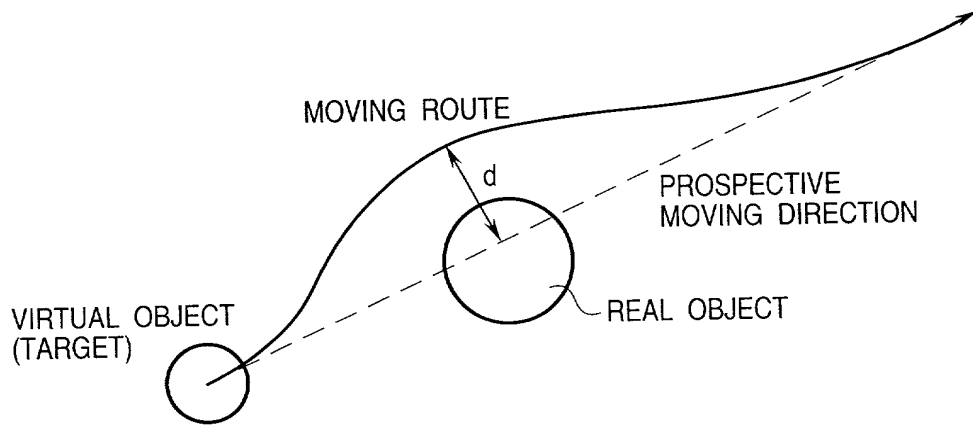


FIG. 20

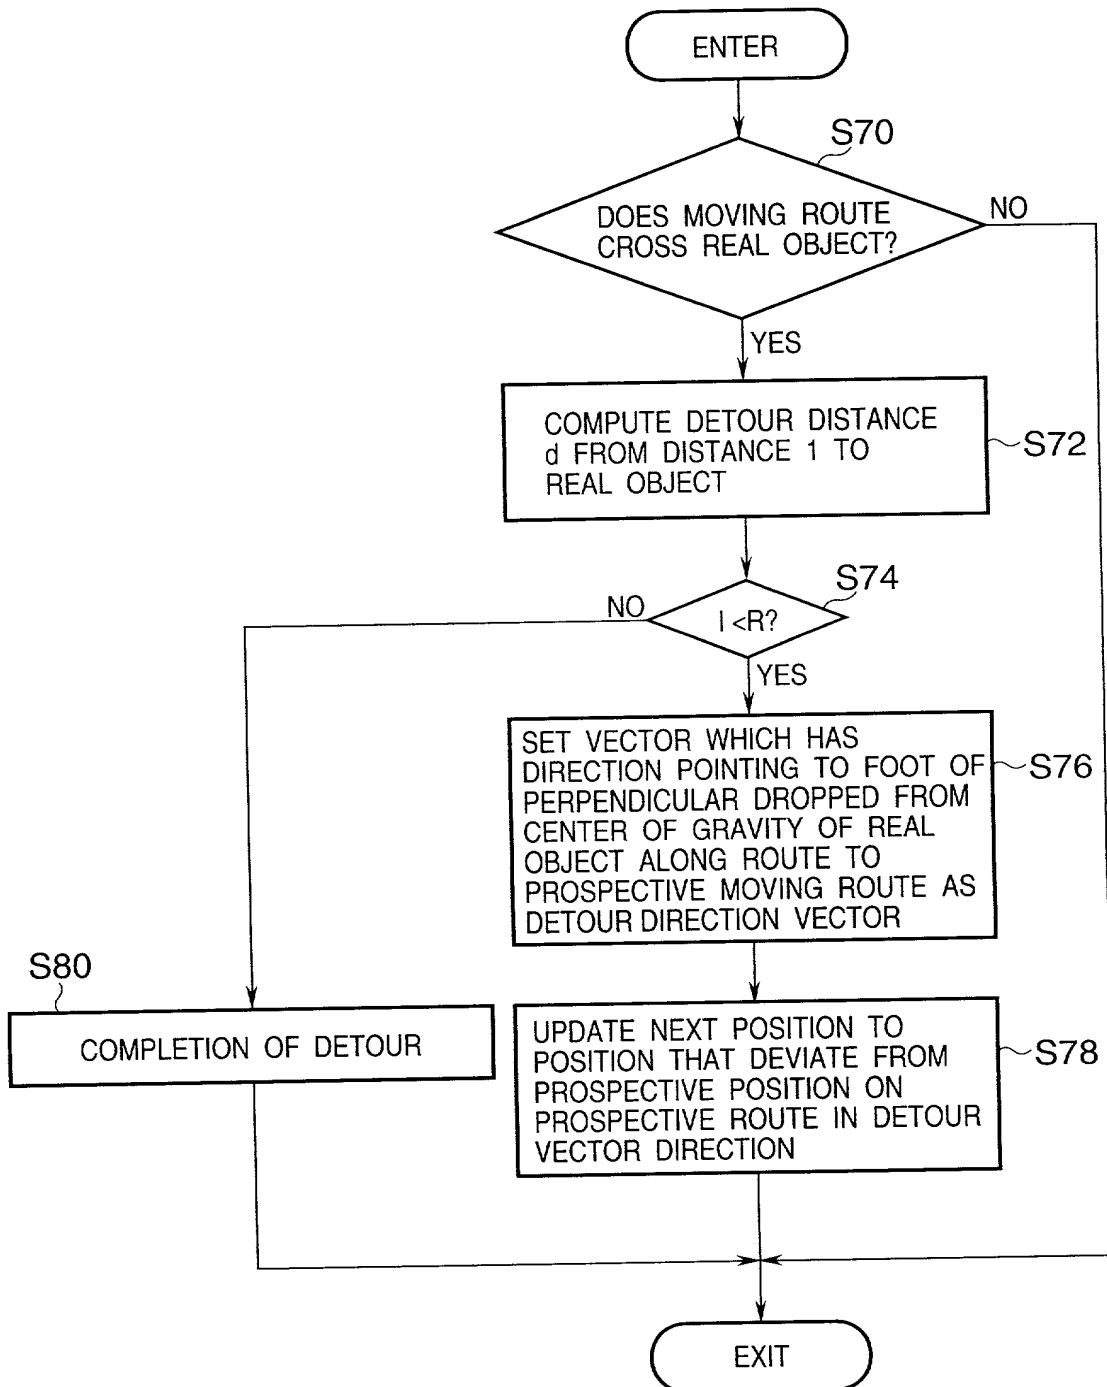
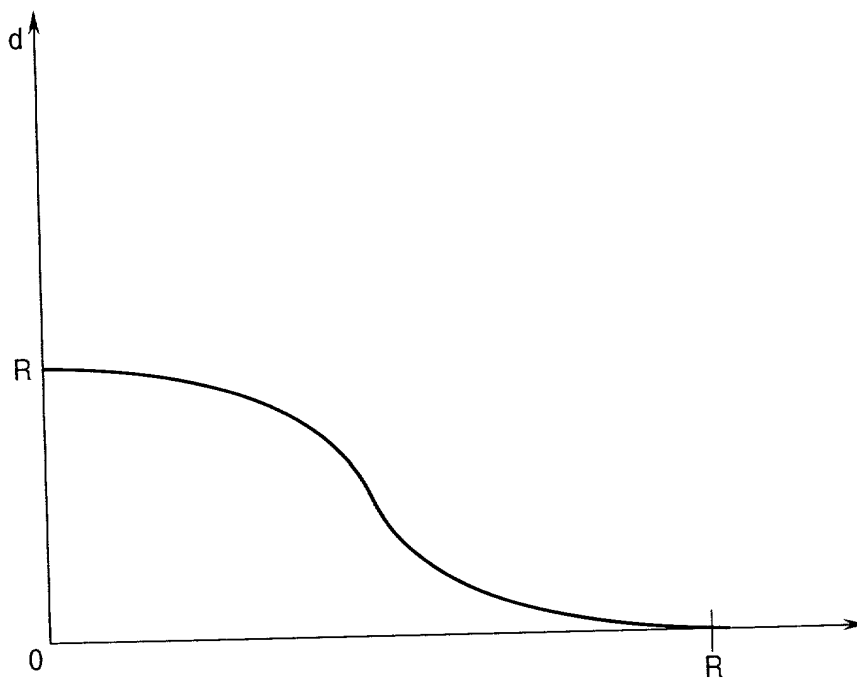


FIG. 21



**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**
(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

GAME APPARATUS FOR MIXED REALITY SPACE, IMAGE PROCESSING METHOD
THEREOF, AND PROGRAM STORAGE MEDIUM

the specification of which [x] is attached hereto. [] was filed on _____

as United States Application No. or PCT International Application No. _____

and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

<u>Country</u>	<u>Application No.</u>	<u>Filed (Day/Mo./Yr.)</u>	<u>(Yes/No)</u> <u>Priority Claimed</u>
JAPAN	11-165710	11/06/1999	Yes

I hereby appoint the practitioners associated with the firm and customer number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Toshikazu OHSHIMA

Inventor's signature Toshikazu Ohshima

Date Feb 14 2000 Citizen/Subject of Japan

Residence 30-21-607, Minamikase 4-chome, Saiwai-ku,
Kawasaki-shi, Kanagawa-ken, Japan

Post Office Address c/o MIXED REALITY SYSTEMS LABORATORY INC.,
145, Hanasakicho 6-chome, Nishi-ku, Yokohama-shi,
Kanagawa-ken, Japan

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**

(Page 2)

Full Name of Second Joint Inventor, if any Kiyohide SATO H

Inventor's signature Kiyohide SATO H

Date Feb. 14, 2000 Citizen/Subject of Japan

Residence 495-301, Kizuki, Nakahara-ku, Kawasaki-shi,
Kanagawa-ken, Japan

Post Office Address c/o MIXED REALITY SYSTEMS LABORATORY INC.,
145, Hanasakicho 6-chome, Nishi-ku, Yokohama-shi,
Kanagawa-ken, Japan

F511/A601948/ald